

## 300-610 Dumps


### Designing Cisco Data Center Infrastructure (DCID)

<https://www.certleader.com/300-610-dumps.html>



#### NEW QUESTION 1

Refer to the exhibit.

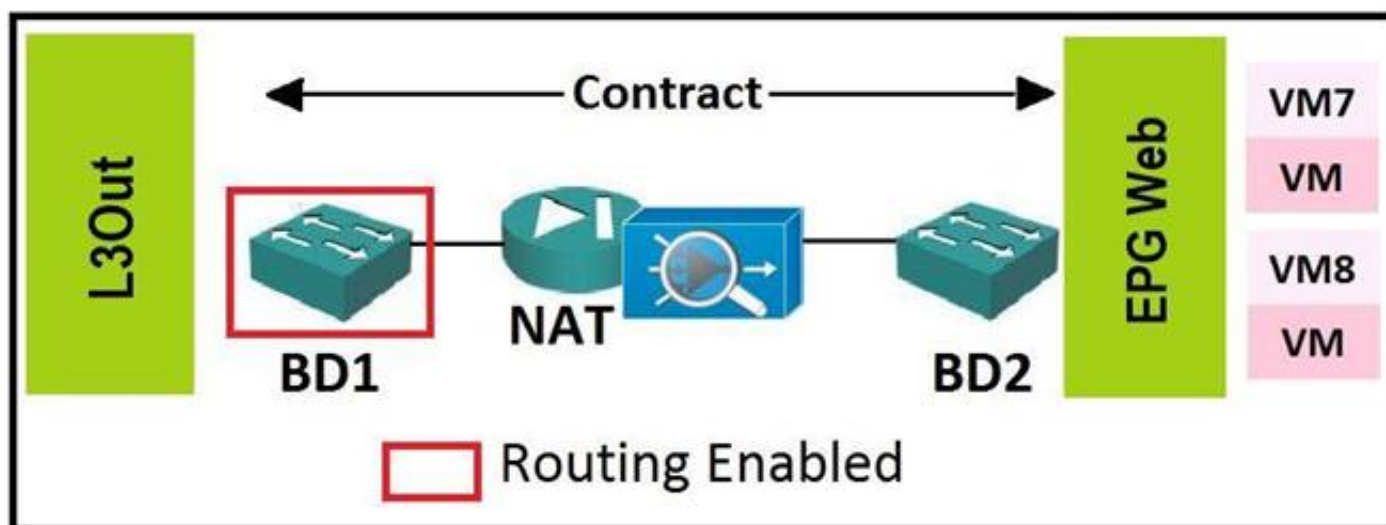

What must be the default gateway of the servers in EPG Web?

- A. subnet address of BD1
- B. subnet address of L3Out
- C. subnet address of BD2
- D. NAT appliance

**Answer: D**

#### NEW QUESTION 2

What influences the number of ISLs that are required between Cisco MDS Series switches?

- A. FCoE protocol
- B. type of storage
- C. end-to-end oversubscription ratio
- D. N Port virtualization

**Answer: C**

#### NEW QUESTION 3

Where does Cisco UCS handle Fibre Channel traffic failover?

- A. on a Cisco UCS Fabric Interconnect ASIC in Fibre Channel switching mode
- B. on the host, by using multipathing software
- C. in the hardware on the Cisco UCS VIC 12xx adapter or later
- D. in the hardware on any Cisco UCS VIC adapter

**Answer: B**

#### NEW QUESTION 4

Which feature provides a sandbox to convert NX-OS CLI commands to REST-based scripts on Cisco Nexus 7700 Series Switches?

- A. NX-API
- B. Postman
- C. Bash shell
- D. Guest shell

**Answer: A**

#### NEW QUESTION 5

Which two types of service profile templates does Cisco UCS support? (Choose two.)

- A. initial
- B. permanent
- C. updating
- D. temporary
- E. connected

**Answer: AC**

#### NEW QUESTION 6

What is the disadvantage of asynchronous storage replication as compared to synchronous storage replication in a disaster recovery design?

- A. reduction in application performance
- B. distance limitations
- C. specific backup requirements
- D. potential data loss

**Answer:** D

**NEW QUESTION 7**

The management of the Cisco Nexus switches is provided over an isolated put-of-band network. The VDC feature is configured on the Cisco Nexus core switches. How is out-of-band management access provided for each VDC?

- A. All the VDC have the same out-of-band IP address.
- B. Each VDC has a dedicated out-of-band Ethernet management port.
- C. Each VDC has a unique out-of-band IP address from the same IP subnet.
- D. Each VDC has a unique out-of-band IP address from different IP subnets among VDCs.

**Answer:** C

**NEW QUESTION 8**

Which two configuration methods can be used to deploy QoS to Cisco MDS Series switches? (Choose two.)

- A. zone-based QoS
- B. multiple QoS policies that match individual devices
- C. VSAN-based QoS
- D. FCoE VLAN-based QoS
- E. multiple QoS policies that match multiple devices

**Answer:** AC

**NEW QUESTION 9**

Which orchestration tool provides a graphical interface to manage LAN and SAN fabrics?

- A. Cisco Virtual Topology System
- B. Cisco Data Center Network Manager
- C. Cisco Nexus Fabric Manager
- D. Cisco CloudCenter

**Answer:** B

**NEW QUESTION 10**

Which type fields can an engineer use to identify an iSCSI participant? (Choose two.)

- A. type
- B. preshared key
- C. port number
- D. identifying tag
- E. hostname

**Answer:** CE

**NEW QUESTION 10**

Which type of encoding is used on 8-Gbps links as compared to 10-Gbps links?

- A. 8-Gbps links use 64B/66B encoding, and 10-Gbps links use 8B/10B encoding.
- B. 8-Gbps links use 8B/10B encoding, and 10-Gbps links use 64B/66B encoding.
- C. 8-Gbps links and 10-Gbps links use 8B/10B encoding.
- D. 8-Gbps links and 10-Gbps links use 64B/66B encoding.

**Answer:** B

**NEW QUESTION 12**

Which element is the main functional component of the architecture that separates the internal fabric and the external network that connects sites when VXLAN EVPN is deployed multisite?

- A. border leaf
- B. service leaf
- C. border gateway
- D. service gateway

**Answer:** C

**NEW QUESTION 16**

Drag and drop the feature descriptions from the left onto the correct UCS Fabric Interconnect modes on the right.

Links are active-active.	End-Host Mode
MAC address learning occurs on the uplink ports.	
STP runs on the uplink ports.	
This is the default mode of operation.	Switch Mode

- A. Mastered  
B. Not Mastered

Answer: A

Explanation:

Links are active-active.	End-Host Mode
MAC address learning occurs on the uplink ports.	
STP runs on the uplink ports.	
This is the default mode of operation.	Switch Mode
	STP runs on the uplink ports.
	This is the default mode of operation.

NEW QUESTION 17

Drag and drop the data center technologies from the left onto the correct descriptions on the right. Not all technologies are used.

cut-through switching	connects a classical Ethernet vPC domain and a Cisco FabricPath cloud to interoperate
OTV	extends Layer 2 domains across distributed data centers
store-and-forward switching	performs Layer 2 lookup as soon as the destination MAC is received
VPC	two separate control planes, performs device aggregation
VPC+	

- A. Mastered  
B. Not Mastered

Answer: A

Explanation:



cut-through switching	VPC+
OTV	OTV
store-and-forward switching	cut-through switching
VPC	VPC
VPC+	

#### NEW QUESTION 22

Drag and drop the components from the left onto the descriptions on the right that indicate what occurs to Fibre Channel fabric when that component fails.

fabric interconnect	The Fibre Channel fabric fails for all of the connected Cisco UCS chassis.
FEX	The Fibre Channel fabric fails for one Cisco UCS chassis.
FEX link of the fabric interconnect	The Fibre Channel fabric fails for some of the servers within a Cisco UCS chassis.
converged network adapter	The Fibre Channel fabric fails for one server.

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

fabric interconnect	converged network adapter
FEX	FEX link of the fabric interconnect
FEX link of the fabric interconnect	fabric interconnect
converged network adapter	FEX

#### NEW QUESTION 24

Which address pool is used when a vHBA template is created?

- A. MAC
- B. WWPN
- C. IP

D. UUID

**Answer:** B

**NEW QUESTION 26**

Which approach splits a pair of clustered fabric interconnects into two standalone devices?

- A. Run the disable fips-mode command on each fabric interconnect.
- B. Run the connect local-management command on each fabric interconnect.
- C. Erase the configuration of both fabric interconnects.
- D. Unplug the Layer 1 and Layer 2 interfaces between the devices.

**Answer:** D

**NEW QUESTION 30**

Which Cisco HyperFlex feature provides virtual machine-level cost scaling for desktop virtualization growth?

- A. HyperFlex Edge support
- B. encryption offload cards
- C. dedicated compute nodes
- D. fabric interconnects

**Answer:** A

**NEW QUESTION 35**

Which two automation requirements can be met by using Puppet? (Choose two.)

- A. Push configuration updates immediately to servers.
- B. Enable clients to pull changes to configuration files.
- C. Enable clients to pull changes without installing an agent.
- D. Provide support for writing new modules in Python.
- E. Enable one-off infrastructure changes to be performed manually.

**Answer:** AB

**NEW QUESTION 40**

Which two configurations are available by using a service profile template in Cisco UCS Manager? (Choose two.)

- A. number of vHBAs
- B. ARP entries
- C. UUID assignment
- D. VXLAN membership
- E. target server

**Answer:** AC

**NEW QUESTION 42**

Which two naming formats identify target or initiator iSCSI nodes? (Choose two.)

- A. WWPN
- B. EUI
- C. IQN
- D. WWN
- E. OUI

**Answer:** CD

**NEW QUESTION 43**

Which two features are provided by deploying an OOB management network in a Cisco Nexus data center? (Choose two.)

- A. Layer 3 path for monitoring purposes
- B. Layer 2 path for server traffic
- C. Layer 2 path for a vPC peer link
- D. Layer 3 path for vPC keepalive packets
- E. Layer 3 path for server traffic

**Answer:** BC

**NEW QUESTION 44**

Which orchestration tool should be used for the management and analytics of servers across multiple sites?

- A. Cisco Intersight
- B. Cisco Nexus Fabric Manager
- C. Cisco UCS Manager
- D. Cisco Data Center Network Manager

**Answer:** A

**NEW QUESTION 46**

An engineer deploys LISP VM mobility. Which feature is configured on the interfaces that have VM mobility enabled?

- A. IP redirects
- B. flow control
- C. proxy ARP
- D. HSRP

**Answer:** C

**NEW QUESTION 47**

Which two configurations allow for routing traffic between two VDCs? (Choose two.)

- A. Connect the VDCs to an external Layer 3 device.
- B. Cross-connect the ports between the VDCs.
- C. Create VRF-aware software infrastructure interfaces.
- D. Create a policy map in the default VDC that routes traffic between the VDCs.
- E. Create interfaces in the VDC that can be accessed by another VDC.

**Answer:** AD

**NEW QUESTION 49**

Which authentication software natively runs within the CLI of Cisco NX-OS devices?

- A. Python
- B. Ansible
- C. Puppet
- D. Chef

**Answer:** B

**NEW QUESTION 52**

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your 300-610 Exam with Our Prep Materials Via below:**

<https://www.certleader.com/300-610-dumps.html>