



Cisco

Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)

NEW QUESTION 1

An engineer is creating a configuration import policy that must terminate if the imported configuration is incompatible with the existing system. Which import mode achieves this result?

- A. merge
- B. atomic
- C. best effort
- D. replace

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401_chapter_01011.html

NEW QUESTION 2

A situation causes a fault to be raised on the APIC. The ACI administrator does not want that fault to be raised because it is not directly relevant to the environment. Which action should the administrator take to prevent the fault from appearing?

- A. Under System -> Faults, right-click on the fault and select Acknowledge Fault so that acknowledged faults will immediately disappear.
- B. Create a stats threshold policy with both rising and falling thresholds defined so that the critical severity threshold matches the squelched threshold.
- C. Under System -> Faults, right-click on the fault and select Ignore Fault to create a fault severity assignment policy that hides the fault.
- D. Create a new global health score policy that ignores specific faults as identified by their unique fault code.

Answer: C

NEW QUESTION 3

A RADIUS user resolves its role via the Cisco AV Pair. What object does the Cisco AV Pair resolve to?

- A. tenant
- B. security domain
- C. primary Cisco APIC
- D. managed object class

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 4

Which feature dynamically assigns or modifies the EPG association of virtual machines based on their attributes?

- A. vzAny contracts
- B. standard contracts
- C. application EPGs
- D. uSeg EPGs

Answer: D

NEW QUESTION 5

DRAG DROP

Drag and drop the Cisco ACI filter entry options from the left onto the correct categories on the right indicating what are required or optional parameters.

Name	Optional Parameters
ARP Flag	
Ether Type	
IP Protocol	
Source Port From	Required Parameters

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_01000.html

NEW QUESTION 6

Where is the COOP database located?

- A. leaf
- B. spine
- C. APIC
- D. endpoint


Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 7

Refer to the exhibit.

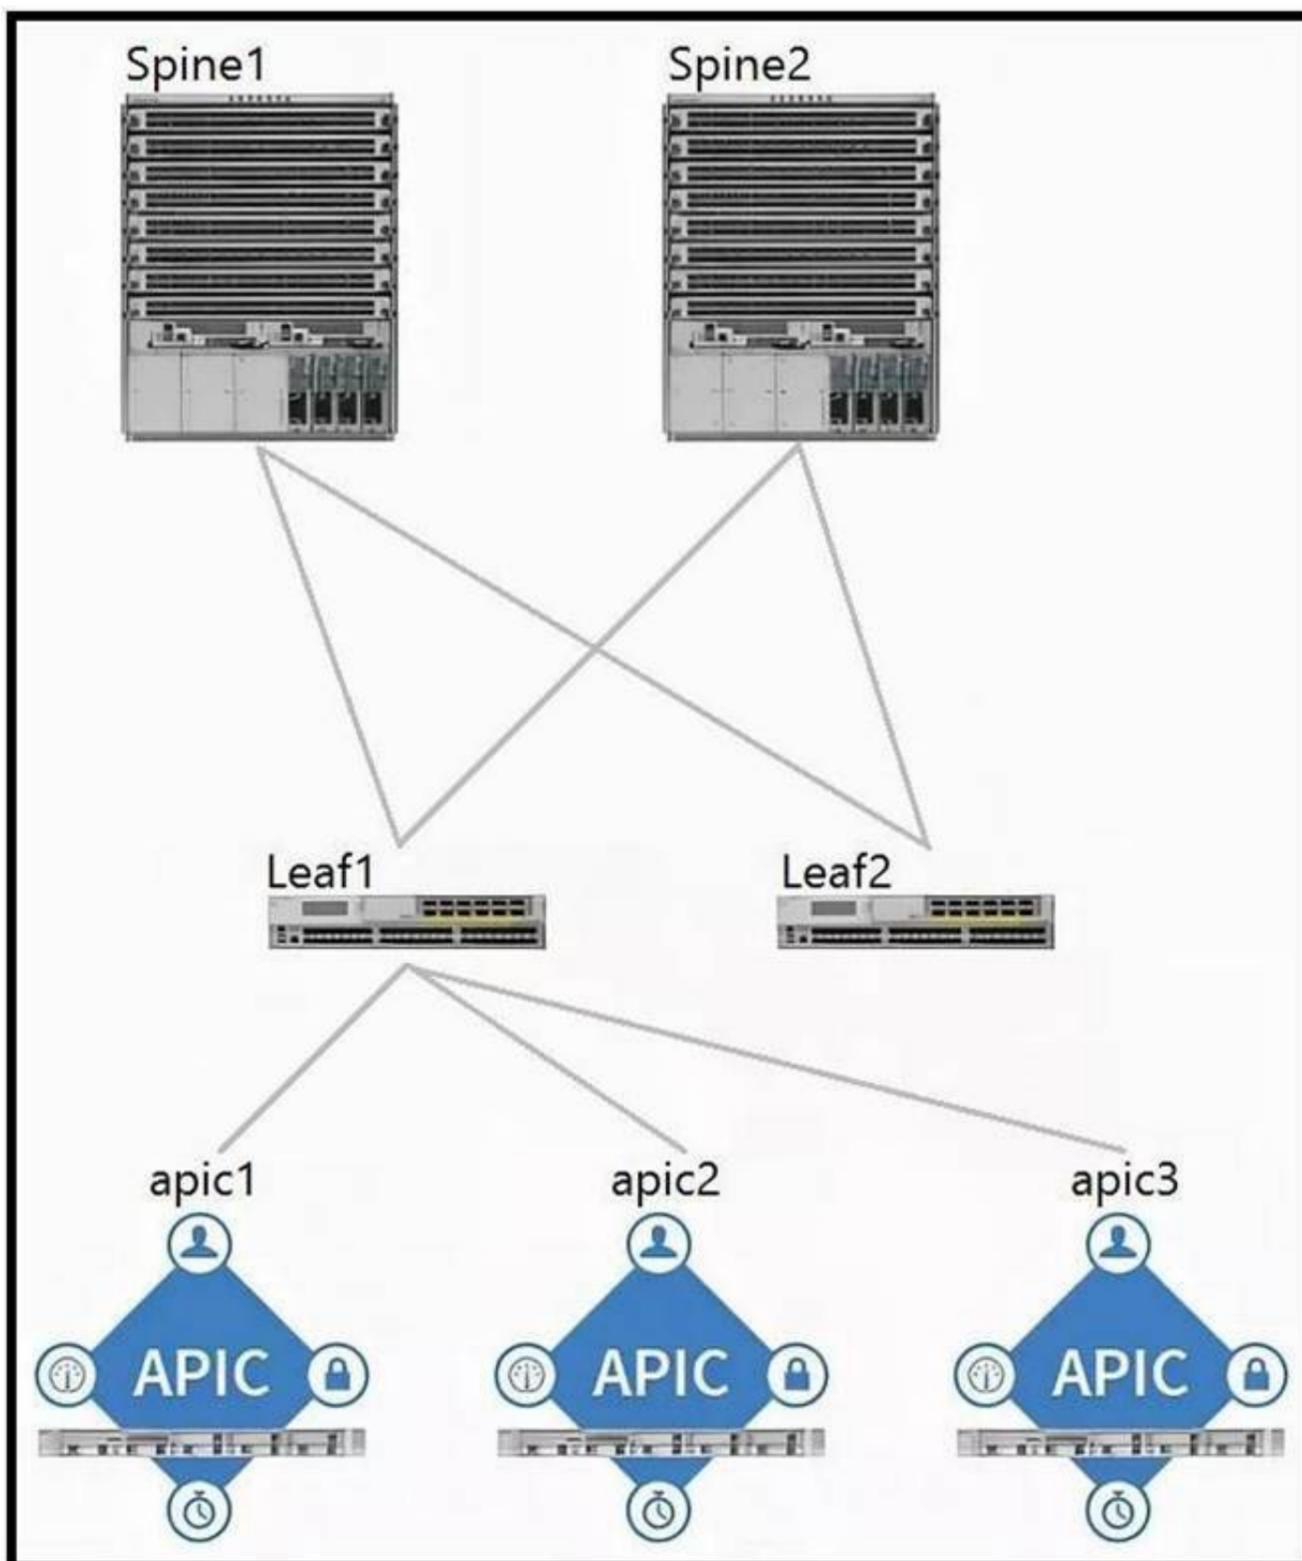

Which two components should be configured as route reflectors in the ACI fabric? (Choose two.)

- A. Spine1
- B. apic1
- C. Spine2
- D. Leaf1
- E. Leaf2
- F. apic2

Answer: AC

NEW QUESTION 8

When creating a subnet within a bridge domain, which configuration option is used to specify the network visibility of the subnet?

- A. limit IP learning to subnet
- B. scope
- C. gateway IP
- D. subnet control

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0111.html

NEW QUESTION 9

An engineer is extending an EPG out of the ACI fabric using static path binding. Which statement about the endpoints is true?

- A. Endpoints must connect directly to the ACI leaf port.
- B. External endpoints are in a different bridge domain than the endpoints in the fabric.
- C. Endpoint learning encompasses the MAC address only.
- D. External endpoints are in the same EPG as the directly attached endpoints.

Answer: C

NEW QUESTION 10

Which endpoint learning operation is completed on the egress leaf switch when traffic is received from an L3Out?

- A. The source MAC and IP address of the traffic is learned as a local endpoint.
- B. The source MAC address of the traffic is learned as a remote endpoint.
- C. No source MAC or IP address of the traffic is learned as a remote endpoint.
- D. The source IP address of the traffic is learned as a remote endpoint.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 10

An engineer configured a bridge domain with the hardware-proxy option for Layer 2 unknown unicast traffic. Which statement is true about this configuration?

- A. The leaf switch drops the Layer 2 unknown unicast packet if it is unable to find the MAC address in the local forwarding tables.
- B. The Layer 2 unknown hardware proxy lacks support of the topology change notification.
- C. The leaf switch forwards the Layers 2 unknown unicast packets to all other leaf switches if it is unable to find the MAC address in its local forwarding tables.
- D. The spine switch drops the Layer 2 unknown unicast packet if it is unable to find the MAC address in the proxy database.

Answer: A

NEW QUESTION 12

An engineer configured Layer 2 extension from the ACI fabric and changed the Layer 2 unknown unicast policy from Flood to Hardware Proxy. How does this change affect the flooding of the L2 unknown unicast traffic?

- A. It is forwarded to one of the spines to perform as a spine proxy.
- B. It is flooded within the whole fabric.
- C. It is dropped by the leaf when the destination endpoint is not present in the endpoint table.
- D. It is forwarded to one of the APICs to perform as a proxy.

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 16

Which action sets Layer 2 loop migration in an ACI Fabric with a Layer 2 Out configured?

- A. Enable MCP on the ACI fabric.
- B. Disable STP in the external network.
- C. Disable STP on the ACI fabric.
- D. Enable STP on the ACI fabric.

Answer: A

NEW QUESTION 20

An engineer is implementing a connection that represents an external bridged network. Which two configurations are used? (Choose two.)

- A. Layer 2 remote fabric
- B. Layer 2 outside
- C. Layers 2 internal
- D. Static path binding
- E. VXLAN outside

Answer: AB

NEW QUESTION 23

Which two actions extend a Layer 2 domain beyond the ACI fabric? (Choose two.)

- A. extending the routed domain out of the ACI fabric
- B. creating a single homed Layer 3 Out
- C. creating an external physical network
- D. extending the bridge domain out of the ACI fabric
- E. extending the EPG out of the ACI fabric

Answer: AE

NEW QUESTION 26


Regarding the MTU value of MP-BGP EVPN control plane packets in Cisco ACI, which statement about communication between spine nodes in different sites is true?

- A. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- B. As a result, the Inter-Site network should be able to carry 9000-bytes packets.
- C. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- D. As a result, the Inter-Site network should be able to carry 1800-bytes packets.
- E. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- F. As a result, the Inter-Site network should be able to carry 1500-bytes packets.
- G. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- H. As a result, the Inter-Site network should be able to carry 9100-bytes packets.

Answer: D

NEW QUESTION 27

Refer to the exhibit.

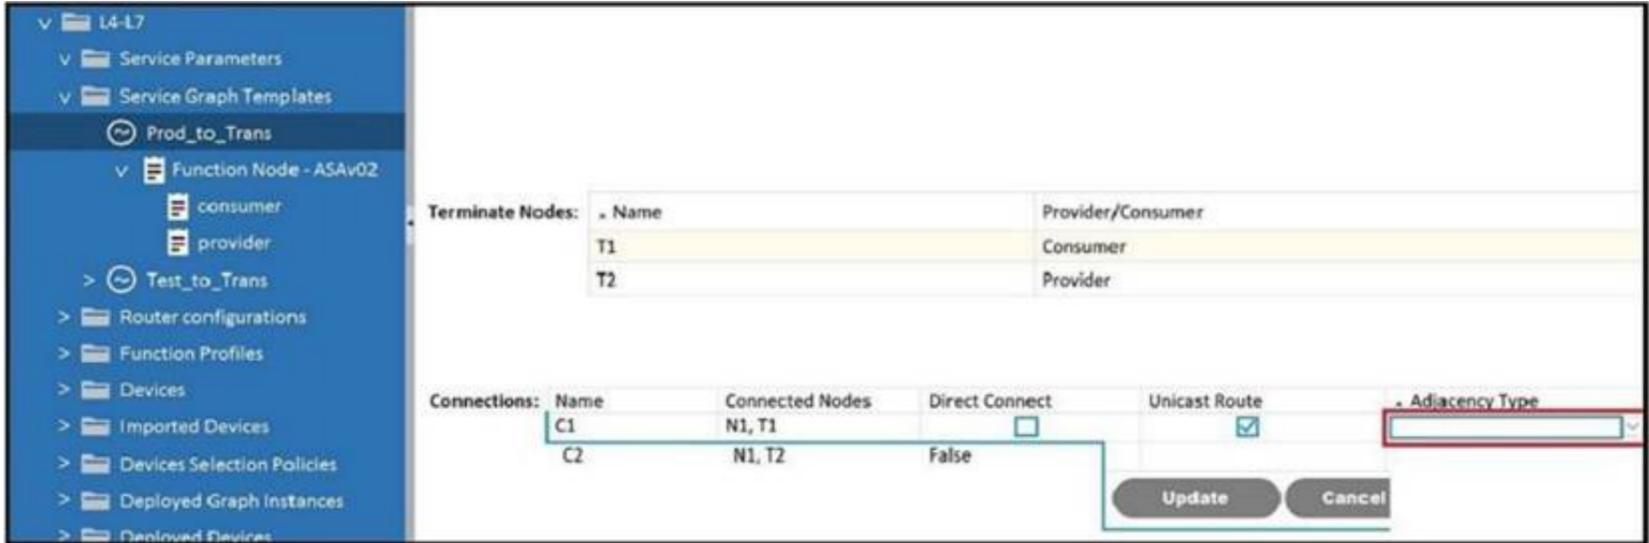


Which Adjacency Type value should be set when the client endpoint and the service node interface are in a different subnet?

- A. Routed
- B. Unicast
- C. L3Out
- D. L3

Answer: D

NEW QUESTION 32

Refer to the exhibit.

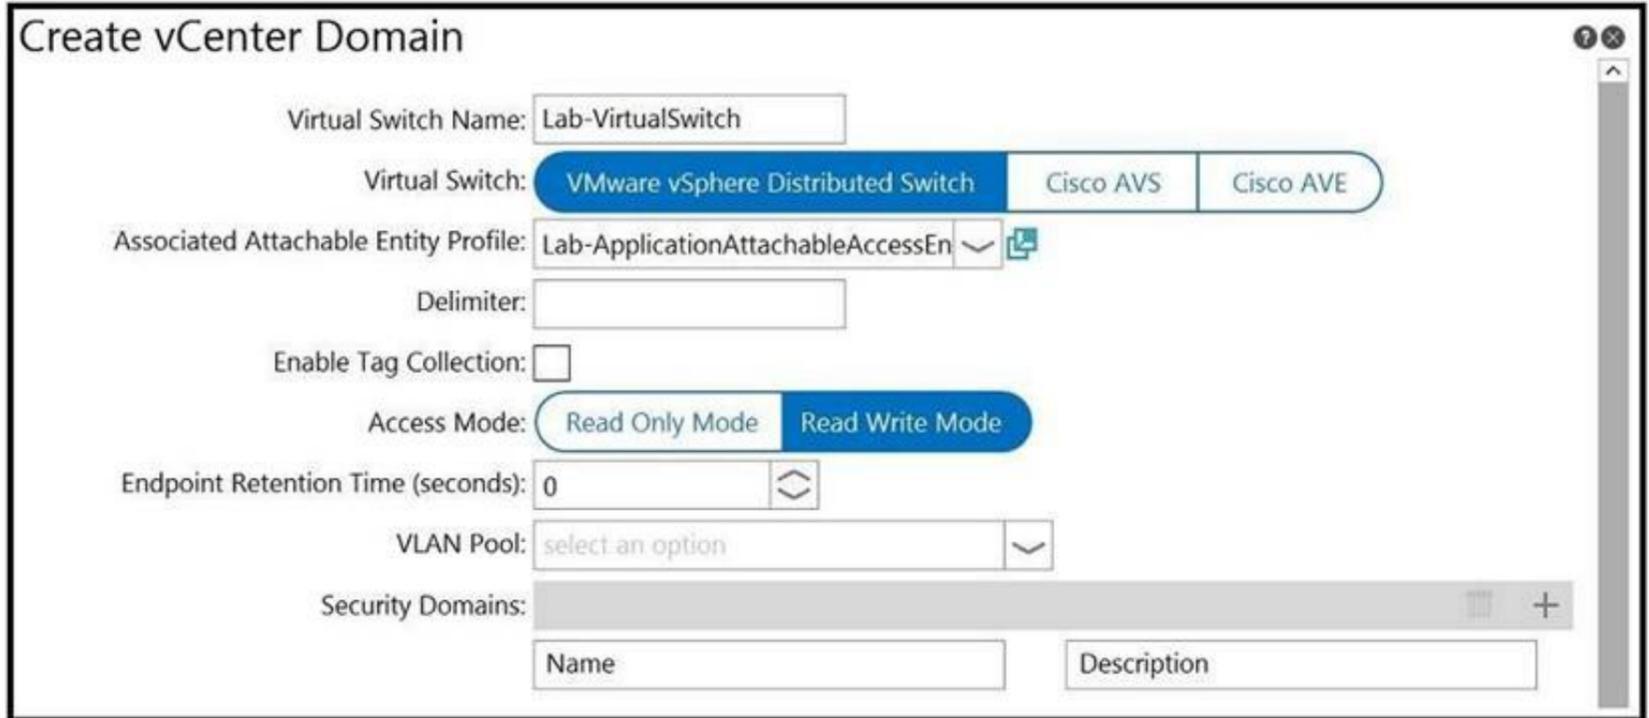


An engineer is integrating a VMware vCenter with Cisco ACI VMM domain configuration. ACI creates port-group names with the format of "Tenant | Application | EPG". Which configuration option is used to generate port groups with names formatted as "Tenant=Application=EPG"?

- A. enable tag collection
- B. security domains
- C. delimiter
- D. virtual switch name

Answer: D

NEW QUESTION 37

Refer to the exhibit.

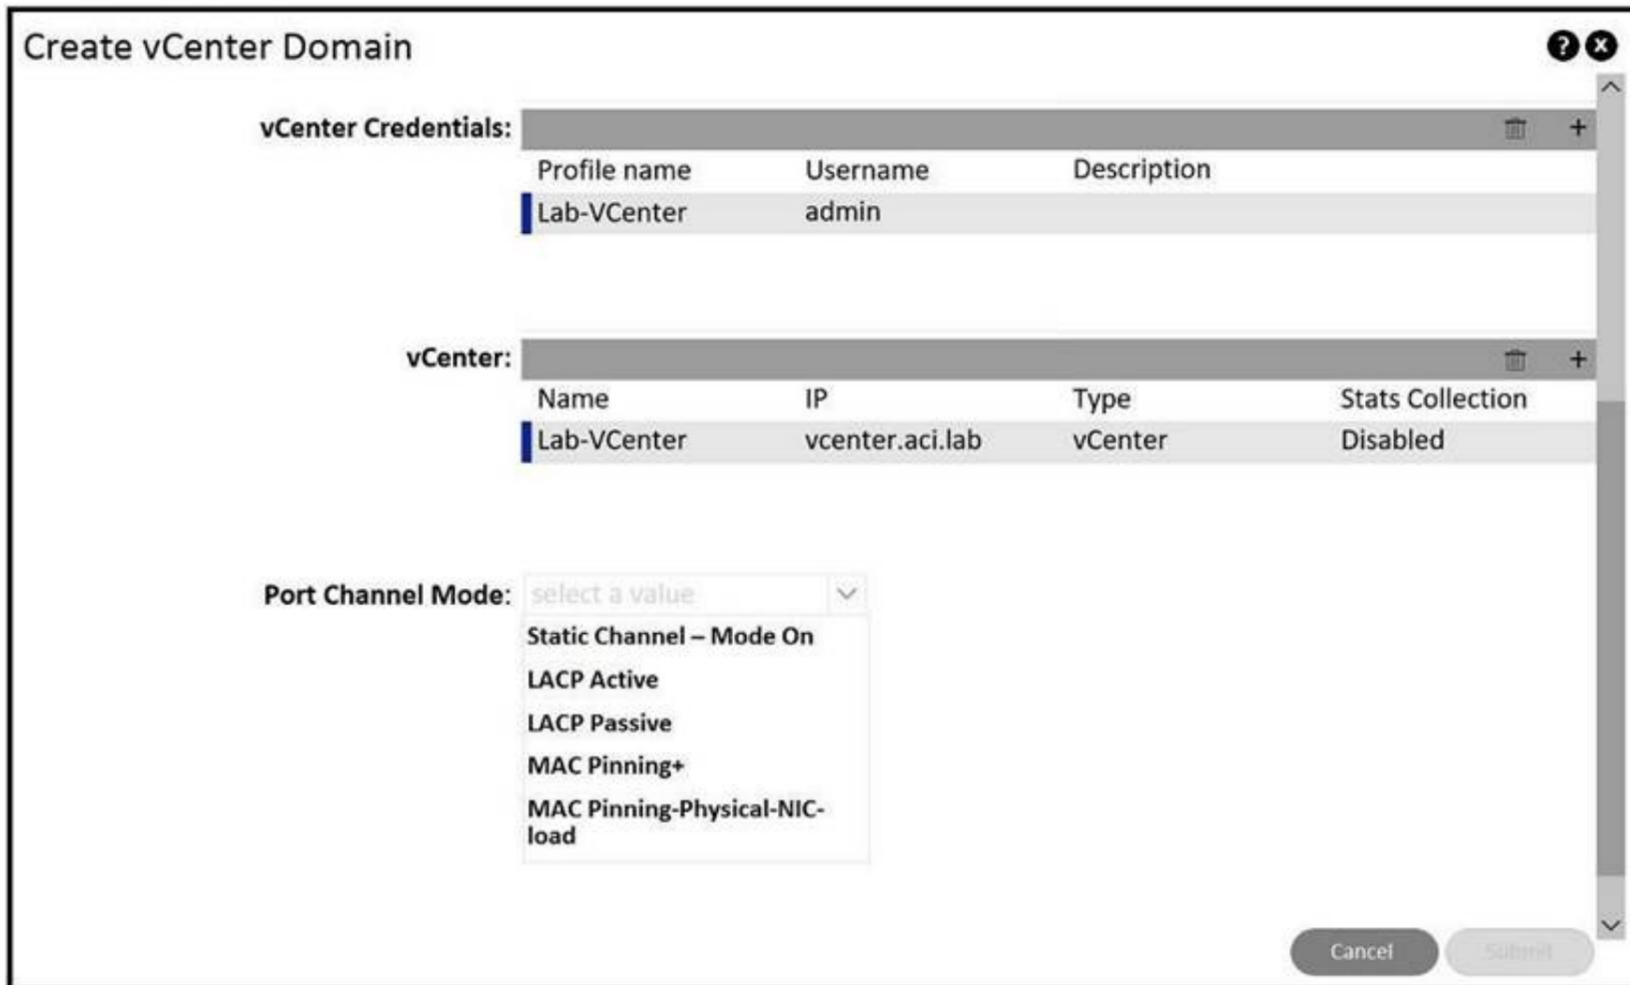

An engineer is implementing Cisco ACI – VMware vCenter integration for a blade server that lacks support of bonding. Which port channel mode results in “route based on originating virtual port” on the VMware VDS?

- A. Static Channel – Mode On
- B. MAC Pinning-Physical-NIC-load
- C. LACP Passive
- D. MAC Pinning+
- E. LACP Active

Answer: D

NEW QUESTION 41

DRAG DROP

Drag and drop the Cisco ACI Layer 4 to Layer 7 service insertion terms on the left to the correct descriptions on the right.

concrete interfaces	ensures reachability between L3 domains
service graph	rendered with local resources that are available in the fabric
device cluster	contains an active-standby pair of firewalls or load balancers
VRF stitching	encapsulations programmed based on their association with logical interfaces

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

concrete interfaces	VRF stitching
service graph	service graph
device cluster	device cluster
VRF stitching	concrete interfaces

NEW QUESTION 42

An engineer has set the VMM resolution immediacy to pre-provision in a Cisco ACI environment. No Cisco Discovery Protocol neighborship has been formed between the hypervisors and the ACI fabric leaf nodes. How does this affect the download policies to the leaf switches?

- A. No policies are downloaded because LLDP is the only supported discovery protocol.

- B. Policies are downloaded when the hypervisor host is connected to the VMM VDS.
- C. Policies are downloaded to the ACI leaf switch regardless of Cisco Discovery Protocol neighborhood.
- D. No policies are downloaded because there is no discovery protocol neighborhood.

Answer: C

NEW QUESTION 47

In the context of VMM, which protocol between ACI leaf and compute hosts ensures that the policies are pushed to the leaf switches for immediate and on demand resolution immediacy?

- A. VXLAN
- B. LLDP
- C. ISIS
- D. STP

Answer: A

Explanation:

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_0101.html

NEW QUESTION 51

What represents the unique identifier of an ACI object?

- A. universal resource identifier (URI)
- B. application programming interface
- C. management information tree
- D. distinguished name

Answer: D

Explanation:

Reference: <https://www.slideshare.net/CiscoDevNet/introduction-to-aci-apis>

NEW QUESTION 56

Refer to the exhibit.

Edit Stats Threshold

transmit B2B credit cumulative

Normal Value: 300

Threshold Direction: Both **Rising** Falling

Rising Thresholds to Config:

- Critical
- Major
- Minor
- Warning

Rising

	Set	Reset
Critical	500	
Major		
Minor		
Warning	400	300

A client reports that the ACI domain connectivity to the fiber channel storage is experiencing a B2B credit oversubscription. The environment has a SYSLOG server for state collection messages. Which value should be chosen to clear the critical fault?

- A. 300
- B. 410
- C. 350

D. 510

Answer: B

NEW QUESTION 61

A data center administrator is upgrading an ACI fabric. There are 3 APIC controllers in the fabric and all the servers are dual-homed to pairs of leaf switches configured in VPC mode. How should the fabric be upgraded to minimize possible traffic impact during the upgrade?

- A. * 1. Create two maintenance groups for the APIC controllers: VPC left and VPC right.* 2. Upgrade the first group of controllers.* 3. Upgrade the second group of controllers.* 4. Upgrade the leaf switches.
- B. * 1. Create two maintenance groups for APIC controllers: VPC left and VPC right.* 2. Upgrade the leaf switches.* 3. Upgrade the first group of controllers.* 4. Upgrade the second group of controllers.
- C. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the APIC controllers.* 3. Upgrade the first group of leaf switches.* 4. Upgrade the second group of leaf switches.
- D. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the first group of switches.* 3. Upgrade the second group of switches.* 4. Upgrade the APIC controllers.

Answer: D

NEW QUESTION 66

Which protocol does ACI use to securely save the configuration in a remote location?

- A. SCP
- B. HTTPS
- C. TFTP
- D. FTP

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Using_Import_Export_to_Recover_Config_States.html

NEW QUESTION 70

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP
- D. SMB
- E. HTTPS

Answer: BC

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b_APIC_Troubleshooting/b_APIC_Troubleshooting_appendix_010011.html

NEW QUESTION 74

Which statement regarding ACI Multi-Pod and TEP pool is true?

- A. The IP addresses used in the IPN network can overlap TEP pool of the APIC.
- B. A different TEP pool must be assigned to each Pod.
- C. The Pod1 TEP pool must be split and a portion of the TEP pool allocated to each Pod.
- D. The same TEP pool is used in all Pods.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739714.html>

NEW QUESTION 76

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 80

A Solutions Architect is asked to design two data centers based on Cisco ACI technology that can extend L2/L3, VXLAN, and network policy across locations. ACI Multi-Pod has been selected. Which two requirements must be considered in this design? (Choose two.)

- A. ACI underlay protocols, i.

- B. COOP, IS-IS and MP-BGP, spans across pod
- C. Create QoS policies to make sure those protocols have higher priority.
- D. A single APIC Cluster is required in a Multi-Pod design
- E. It is important to place the APIC Controllers in different locations in order to maximize redundancy and reliability.
- F. ACI Multi-Pod requires an IP Network supporting PIM-Bidir.
- G. ACI Multi-Pod does not support Firewall Clusters across Pod
- H. Firewall Clusters should always be local.
- I. Multi-Pod requires multiple APIC Controller Clusters, one per pod
- J. Make sure those clusters can communicate to each other through a highly available connection.

Answer: AE

NEW QUESTION 83

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)