

Exam Questions 300-715

Implementing and Configuring Cisco Identity Services Engine (SISE)

<https://www.2passeasy.com/dumps/300-715/>



NEW QUESTION 1

Which personas can a Cisco ISE node assume?

- A. policy service, gatekeeping, and monitoring
- B. administration, monitoring, and gatekeeping
- C. administration, policy service, and monitoring
- D. administration, policy service, gatekeeping

Answer: C

Explanation:

Reference: https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_dis_deploy.html

NEW QUESTION 2

What occurs when a Cisco ISE distributed deployment has two nodes and the secondary node is deregistered?

- A. The secondary node restarts.
- B. The primary node restarts.
- C. Both nodes restart.
- D. The primary node becomes standalone.

Answer: C

NEW QUESTION 3

DRAG DROP

Drag the steps to configure a Cisco ISE node as a primary administration node from the left into the correct order on the right.

Select the check box next to the current node, and then click Edit.	Step 1
Click Save.	Step 2
Choose Administration > System > Deployment.	Step 3
Click Make Primary.	Step 4

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_dis_deploy.html

NEW QUESTION 4

What is a requirement for Feed Service to work?

- A. TCP port 8080 must be opened between Cisco ISE and the feed server.
- B. Cisco ISE has access to an internal server to download feed update.
- C. Cisco ISE has a base license.
- D. Cisco ISE has Internet access to download feed update.

Answer: B

NEW QUESTION 5

When configuring Active Directory groups, what does the Cisco ISE use to resolve ambiguous group names?

- A. MIB
- B. SID
- C. MAB
- D. TGT

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/security/ise/2-0/ise_active_directory_integration/b_ISE_AD_integration_2x.html

NEW QUESTION 6

Which interface-level command is needed to turn on 802.1X authentication?

- A. dot1x system-auth-control
- B. dot1x pae authenticator
- C. aaa server radius dynamic-author
- D. authentication host-mode single- host

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst4500/12-2/31sg/configuration/guide/conf/dot1x.html>

NEW QUESTION 7

What must be configured on the Cisco ISE authentication policy for unknown MAC addresses/identities for successful authentication?

- A. continue
- B. pass
- C. drop
- D. reject

Answer: A

NEW QUESTION 8

Which command displays all 802.1X/MAB sessions that are active on the switch ports of a Cisco Catalyst switch?

- A. show authentication sessions interface Gi1/0/x output
- B. show authentication sessions
- C. show authentication sessions output
- D. show authentication sessions interface Gi 1/0/x

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/security/s1/sec-s1-xe-3se-3850-cr-book/sec-s1-xe-3se-3850-cr-book_chapter_01.html#wp3404908137

NEW QUESTION 9

What are two requirements of generating a single certificate in Cisco ISE by using a certificate provisioning portal, without generating a certificate signing request? (Choose two.)

- A. Enter the IP address of the device.
- B. Enter the common name.
- C. Choose the hashing method.
- D. Locate the CSV file for the device MAC.
- E. Select the certificate template.

Answer: BE

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security/identity-services-engine/200534-ISE-2-0-Certificate-Provisioning-Portal.html>

NEW QUESTION 10

What is the purpose of the ip http server command on a switch?

- A. It enables the https server for users for web authentication.
- B. It enables dot1x authentication on the switch.
- C. It enables MAB authentication on the switch.
- D. It enables the switch to redirect users for web authentication.

Answer: C

NEW QUESTION 10

What is the minimum certainty factor when creating a profiler policy?

- A. the minimum number that a predefined condition provides
- B. the maximum number that a predefined condition provides
- C. the minimum number that a device certainty factor must reach to become a member of the profile
- D. the maximum number that a device certainty factor must reach to become a member of the profile

Answer: C

NEW QUESTION 12

Which profiling probe collects the user-agent string?

- A. DHCP
- B. HTTP
- C. NMAP

D. AD

Answer: B

NEW QUESTION 15

Which three default endpoint identity groups does Cisco ISE create? (Choose three.)

- A. endpoint
- B. unknown
- C. blacklist
- D. profiled
- E. whitelist

Answer: BCD

Explanation:

Reference: https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_man_identities.html#wp1203054

NEW QUESTION 18

What allows an endpoint to obtain a digital certificate from Cisco ISE during a BYOD flow?

- A. Application Visibility and Control
- B. Supplicant Provisioning Wizard
- C. My Devices Portal
- D. Network Access Control

Answer: C

NEW QUESTION 20

Which protocol must be allowed for a BYOD device to access the BYOD portal?

- A. HTTPS
- B. HTTP
- C. SSH
- D. SMTP

Answer: A

NEW QUESTION 25

Which Cisco ISE service allows an engineer to check the compliance of endpoints before connecting to the network?

- A. qualys
- B. posture
- C. personas
- D. nexpose

Answer: B

NEW QUESTION 30

DRAG DROP


Drag the Cisco ISE node types from the left onto the appropriate purposes on the right.

Administration	provides advanced troubleshooting tools that can be used to effectively manage the network and resources
Policy Service	shares context-sensitive information from Cisco ISE to subscribers
Monitoring	manages all system-related configuration and configurations that relate to functionality such as authentication, authorization, and auditing
pxGrid	provides network access, posture, guest access, client provisioning and profiling services, and evaluates the policies to make all decisions

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

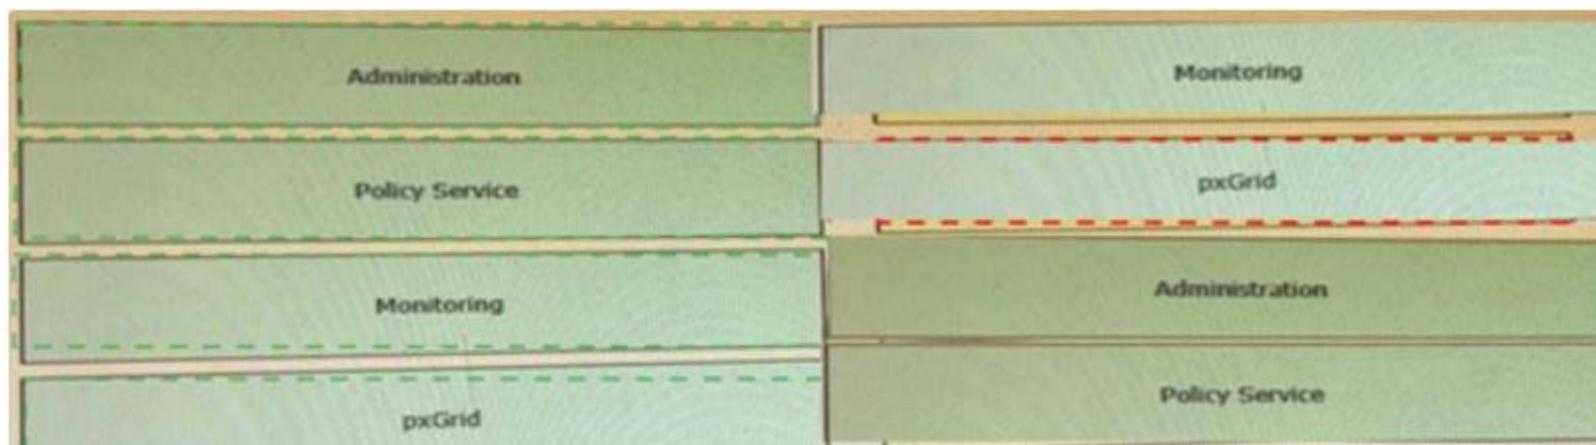

NEW QUESTION 34

What are two benefits of TACACS+ versus RADIUS for device administration? (Choose two.)

- A. TACACS+ has command authorization, and RADIUS does not.
- B. TACACS+ uses UDP, and RADIUS uses TCP.
- C. TACACS+ supports 802.1X, and RADIUS supports MAB.
- D. TACACS+ provides the service type, and RADIUS does not.
- E. TACACS+ encrypts the whole payload, and RADIUS encrypts only the password.

Answer: AE

NEW QUESTION 35

Which two features must be used on Cisco ISE to enable the TACACS+ feature? (Choose two.)

- A. Command Sets
- B. Server Sequence
- C. Device Administration License
- D. External TACACS Servers
- E. Device Admin Service

Answer: CE

NEW QUESTION 37

What is a characteristic of the UDP protocol?

- A. UDP can detect when a server is down.
- B. UDP can detect when a server is slow.
- C. UDP offers best-effort delivery.
- D. UDP offers information about a non-existent server.

Answer: C

NEW QUESTION 41

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-715 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-715 Product From:

<https://www.2passeasy.com/dumps/300-715/>

Money Back Guarantee

300-715 Practice Exam Features:

- * 300-715 Questions and Answers Updated Frequently
- * 300-715 Practice Questions Verified by Expert Senior Certified Staff
- * 300-715 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-715 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year