

Cisco

Exam Questions 300-715

Implementing and Configuring Cisco Identity Services Engine (SISE)



NEW QUESTION 1

Which supplicant(s) and server(s) are capable of supporting EAP-CHAINING?

- A. Cisco Secure Services Client and Cisco Access Control Server
- B. Cisco AnyConnect NAM and Cisco Identity Service Engine
- C. Cisco AnyConnect NAM and Cisco Access Control Server
- D. Windows Native Supplicant and Cisco Identity Service Engine

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/wireless-mobility/eap-fast/200322-Understanding-EAP-FAST-and-Chaining-imp.html>

NEW QUESTION 2

How is policy services node redundancy achieved in a deployment?

- A. by creating a node group
- B. by deploying both primary and secondary node
- C. by enabling VIP
- D. by utilizing RADIUS server list on the NAD

Answer: B

NEW QUESTION 3

In which two ways can users and endpoints be classified for TrustSec? (Choose two.)

- A. VLAN
- B. dynamic
- C. QoS
- D. SGACL
- E. SXP

Answer: AD

NEW QUESTION 4

Which permission is common to the Active Directory Join and Leave operations?

- A. Remove the Cisco ISE machine account from the domain.
- B. Search Active Directory to see if a Cisco ISE machine account already exists.
- C. Set attributes on the Cisco ISE machine account.
- D. Create a Cisco ISE machine account in the domain if the machine account does not already exist.

Answer: B

NEW QUESTION 5

A network administrator has just added a front desk receptionist account to the Cisco ISE Guest Service sponsor group. Using the Cisco ISE Guest Sponsor Portal, which guest services can the receptionist provide?

- A. Keep track of guest user activities.
- B. Create and manage guest user accounts.
- C. Configure authorization settings for guest users.
- D. Authenticate guest users to Cisco ISE.

Answer: B

NEW QUESTION 6

Which advanced option within a WLAN must be enabled to trigger Central Web Authentication for Wireless users on AireOS controller?

- A. DHCP server
- B. override Interface ACL
- C. static IP tunneling
- D. AAA override

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/wireless/controller/7-4/configuration/guides/consolidated/b_cg74_CONSOLIDATED/b_cg74_CONSOLIDATED_chapter_010110111.html

NEW QUESTION 7

Which configuration is required in the Cisco ISE authentication policy to allow Central Web Authentication?

- A. MAB and if user not found, continue
- B. MAB and if authentication failed, continue

- C. Dot1x and if authentication failed, continue
- D. Dot1x and if user not found, continue

Answer: A

NEW QUESTION 8

Which profiling probe collects the user-agent string?

- A. DHCP
- B. HTTP
- C. NMAP
- D. AD

Answer: B

NEW QUESTION 9

Which use case validates a change of authorization?

- A. An endpoint that is disconnected from the network is discovered.
- B. Endpoints are created through device registration for the guests.
- C. An endpoint profiling policy is changed for authorization policy.
- D. An authenticated, wired EAP-capable endpoint is discovered.

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/security/ise/1-2/user_guide/ise_user_guide/ise_prof_pol.html

NEW QUESTION 10

Which default endpoint identity group does an endpoint that does not match any profile in Cisco ISE become a member of?

- A. blacklist
- B. unknown
- C. whitelist
- D. profiled
- E. endpoint

Answer: B

Explanation:

Reference: https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_man_identities.html

NEW QUESTION 10

What service can be enabled on the Cisco ISE node to identify the types of devices connecting to a network?

- A. profiling
- B. central web authentication
- C. MAB
- D. posture

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/security/ise/2-1/admin_guide/b_ise_admin_guide_21/b_ise_admin_guide_20_chapter_010100.html

NEW QUESTION 11

Which two probes must be enabled for the ARP cache to function in the Cisco ISE profiling service so that a user can reliably bind the IP addresses and MAC addresses of endpoints? (Choose two.)

- A. SNMP
- B. HTTP
- C. RADIUS
- D. DHCP
- E. NetFlow

Answer: CD

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/security/ise/2-1/admin_guide/b_ise_admin_guide_21/b_ise_admin_guide_20_chapter_010100.html

NEW QUESTION 15

Which two ports do network devices typically use for CoA? (Choose two.)

- A. 19005
- B. 443
- C. 3799

- D. 8080
- E. 1700

Answer: CE

Explanation:
Reference: [https://documentation.meraki.com/MR/Encryption_and_Authentication/Change_of_Authorization_with_RADIUS_\(CoA\)_on_MR_Access_Points](https://documentation.meraki.com/MR/Encryption_and_Authentication/Change_of_Authorization_with_RADIUS_(CoA)_on_MR_Access_Points)

NEW QUESTION 17

Which three default endpoint identity groups does Cisco ISE create? (Choose three.)

- A. endpoint
- B. unknown
- C. blacklist
- D. profiled
- E. whitelist

Answer: BCD

Explanation:
Reference: https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_man_identities.html#wp1203054

NEW QUESTION 22

Which two components are required for creating a Native Supplicant Profile within a BYOD flow? (Choose two.)

- A. Redirect ACL
- B. Connection Type
- C. Operating System
- D. Windows Settings
- E. iOS Settings

Answer: CE

NEW QUESTION 24

If a user reports a device lost or stolen, which portal should be used to prevent the device from accessing the network while still providing information about why the device is blocked?

- A. Client Provisioning
- B. BYOD
- C. Guest
- D. Blacklist

Answer: D

Explanation:
Reference: https://www.cisco.com/c/en/us/td/docs/security/ise/1-3/admin_guide/b_ise_admin_guide_13/b_ise_admin_guide_sample_chapter_010000.html

NEW QUESTION 29

Which two endpoint compliance statuses are possible? (Choose two.)

- A. compliant
- B. valid
- C. unknown
- D. known
- E. invalid

Answer: AC

NEW QUESTION 33

DRAG DROP

Drag the Cisco ISE node types from the left onto the appropriate purposes on the right.


Administration	provides advanced troubleshooting tools that can be used to effectively manage the network and resources
Policy Service	shares context-sensitive information from Cisco ISE to subscribers
Monitoring	manages all system-related configuration and configurations that relate to functionality such as authentication, authorization, and auditing
pxGrid	provides network access, posture, guest access, client provisioning and profiling services, and evaluates the policies to make all decisions

A. Mastered

B. Not Mastered

Answer: A

Explanation:

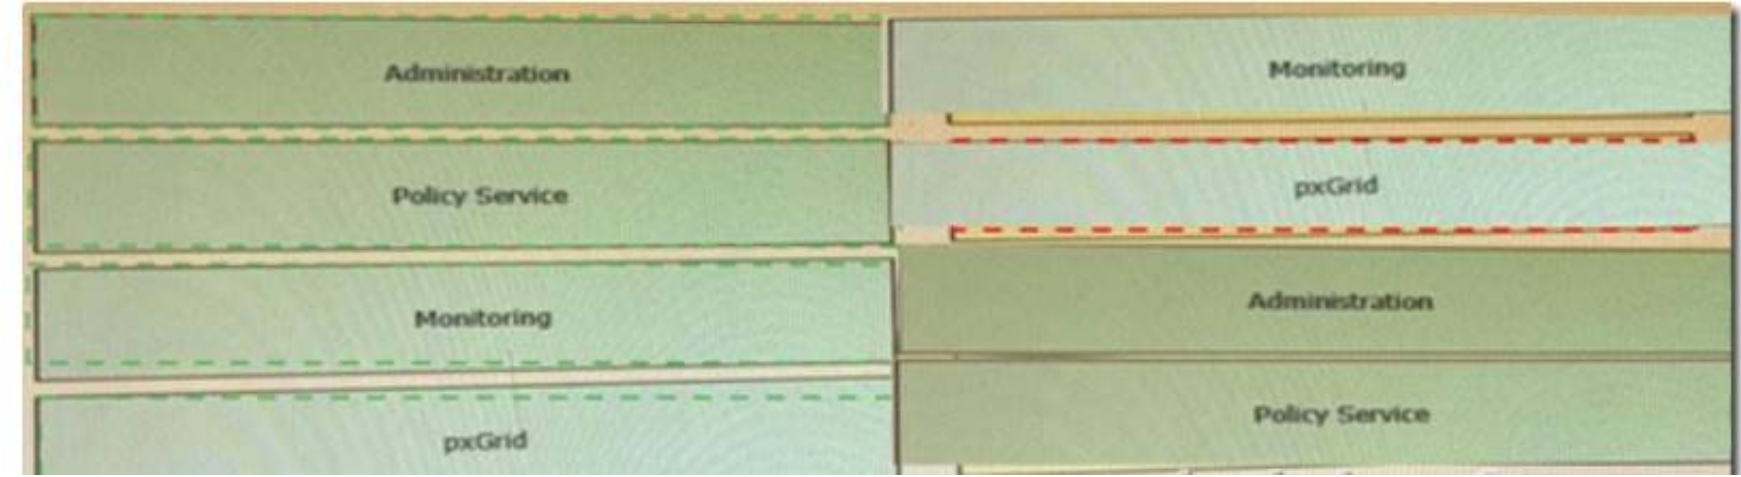

NEW QUESTION 36

What must match between Cisco ISE and the network access device to successfully authenticate endpoints?

- A. shared secret
- B. profile
- C. certificate
- D. SNMP version

Answer: A

Explanation:

Reference: https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_man_network_devices.html

NEW QUESTION 37

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-715 Practice Exam Features:

- * 300-715 Questions and Answers Updated Frequently
- * 300-715 Practice Questions Verified by Expert Senior Certified Staff
- * 300-715 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-715 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-715 Practice Test Here](#)