

## NS0-184 Dumps

### NetApp Certified Storage Installation Engineer - ONTAP

<https://www.certleader.com/NS0-184-dumps.html>



**NEW QUESTION 1**

Click the Exhibit button.

## NetApp CN1610 (10GbE)



## Cisco Nexus 3132Q-V (40GbE)

A customer wants to replace their ONTAP cluster CN1610 switches with Cisco Nexus 3132Q-V switches. They want to perform a non-disruptive upgrade. Referring to the exhibit, which cable will be required to non-disruptively migrate to the new switches?

- A. a 10GbE SFP+ to SFP+ cable
- B. a 100GbE QSFP28+ to 4x25GbE SFP28+ cable
- C. a 40GbE QSFP+ to QSFP+ cable
- D. a 40GbE QSFP+ to 4x10GbE SFP+ cable


**Answer: B**

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/7-x/upgrade/guide/b\\_Cisco\\_Nexus\\_9000\\_Series\\_NXOS\\_Software\\_Upgrade\\_and\\_Downgrade\\_Guide\\_Release\\_7x/b\\_Cisco\\_Nexus\\_9000\\_Series\\_NXOS\\_Software\\_Upgrade\\_and\\_Downgrade\\_Guide\\_Release\\_7x\\_chapter\\_010.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/7-x/upgrade/guide/b_Cisco_Nexus_9000_Series_NXOS_Software_Upgrade_and_Downgrade_Guide_Release_7x/b_Cisco_Nexus_9000_Series_NXOS_Software_Upgrade_and_Downgrade_Guide_Release_7x_chapter_010.html)

**NEW QUESTION 2**

Click the Exhibit button.

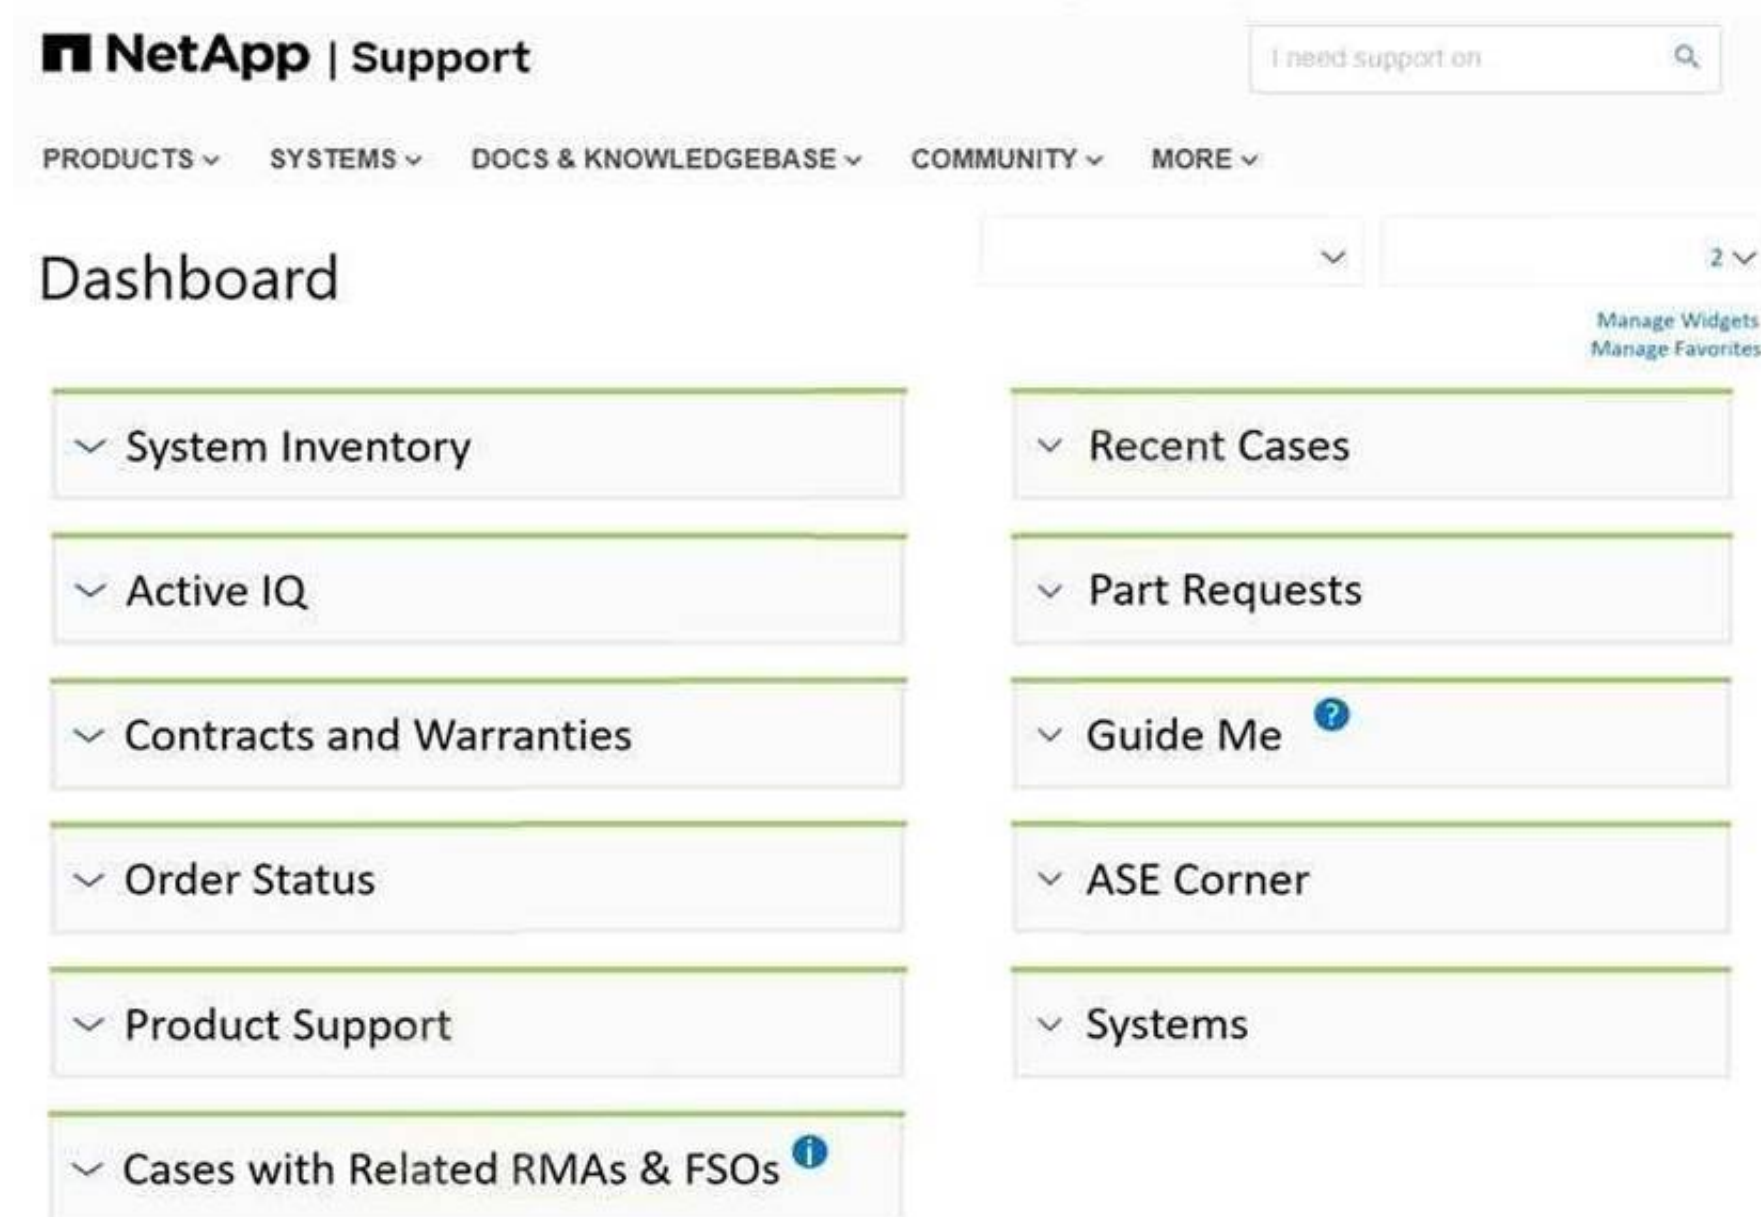

During an ONTAP cluster handover procedure, your customer asks how to identify and solve issues that might occur on the newly deployed array. Referring to the exhibit, which two widgets would the customer use to help with these issues? (Choose two.)

- A. Guide Me
- B. Active IQ
- C. Contracts and Warranties
- D. ASE Corner

**Answer: AC**

### NEW QUESTION 3


You are preparing for the installation of a new AFF A400 system with NS224 NS224 storage shelves. You want to gather information on the connectivity options for the external shelves. In this scenario, which NetApp tool would you use for this task?

- A. Hardware Universe.
- B. Active IQ Config Advisor
- C. Active IQ Unified Manager
- D. Interoperability Matrix Tool

**Answer: A**

### NEW QUESTION 4

Click the Exhibit button.

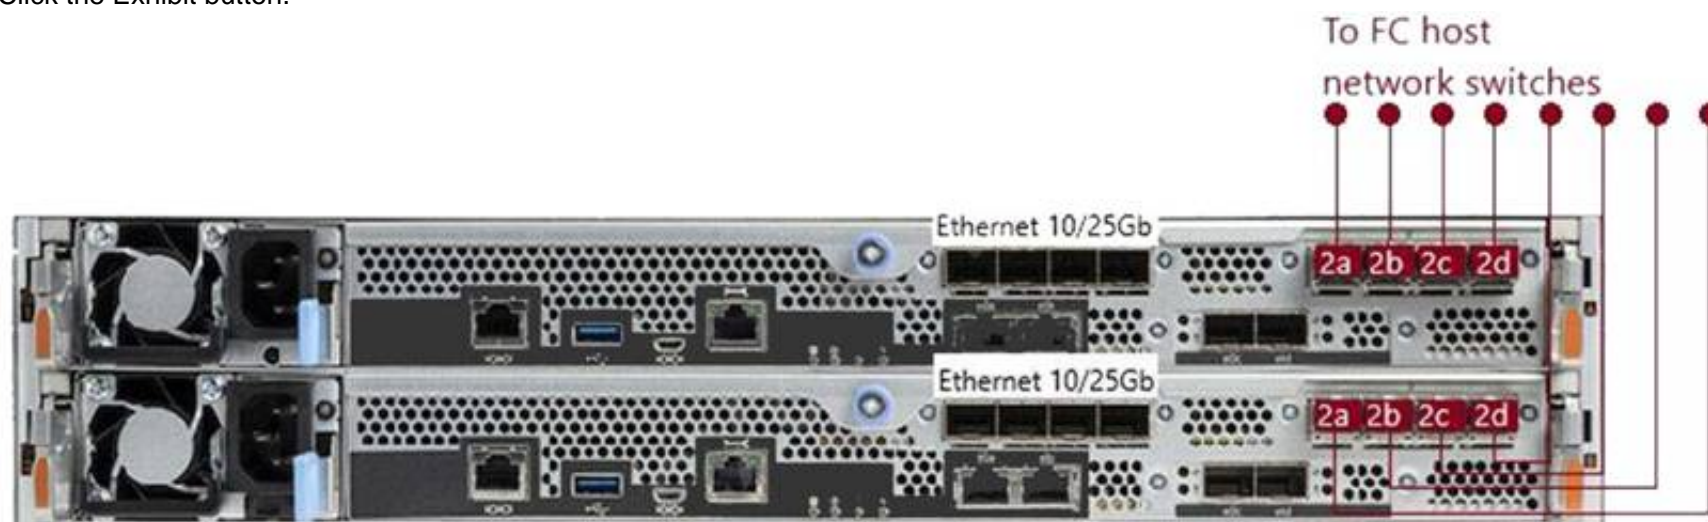

Referring to the exhibit, you installed a new AFF A250 HA system with FC at a customer site. The customer asks how many ports can be used for the Ethernet host connections. In this scenario, what would you tell the customer?

- A. 4
- B. 8
- C. 10
- D. 12

**Answer: D**

### NEW QUESTION 5

Which two statements are true about the LIFs that are used for a cluster peer relationship? (Choose two.)

- A. The MTU size must be set to 9000 bytes on all the LIFs used for the cluster peering.
- B. The LIFs must use the default intercluster service policy.
- C. The LIFs must be in dedicated broadcast domains and IPspaces.
- D. At least one LIF per node is required on each cluster.

**Answer: BC**

### NEW QUESTION 6

You want to enable secure communication with the SP or BMC through CA-signed certificates. Which two certificate types must be installed in this scenario? (Choose two.)

- A. cluster certificate
- B. server certificate
- C. root CA certificate
- D. ONTAP certificate

**Answer: BC**

### Explanation:

Reference:

[https://kb.netapp.com/Advice\\_and\\_Troubleshooting/Data\\_Storage\\_Software/ONTAP\\_OS/How\\_to\\_configure\\_communication\\_between\\_ONTAP\\_and\\_Service\\_Processor\\_\(SP\)\\_or\\_BMC\\_with\\_Certificate\\_Authority\\_\(CA\)\\_signed\\_certificates](https://kb.netapp.com/Advice_and_Troubleshooting/Data_Storage_Software/ONTAP_OS/How_to_configure_communication_between_ONTAP_and_Service_Processor_(SP)_or_BMC_with_Certificate_Authority_(CA)_signed_certificates)

### NEW QUESTION 7

On which type of network interfaces are the cluster interconnect LIFs created?

- A. on an FC or FCoE port
- B. on an interface group
- C. on a UTA port shared with other LIFs
- D. on a physical port

**Answer: B**



#### NEW QUESTION 8

When creating a new 3.8 TB SSD-based aggregate, what is the default RAID type used with ONTAP 9.8?

- A. RAID 4
- B. RAID-TEC
- C. RAID 0
- D. RAID DP

**Answer: D**

#### NEW QUESTION 9

After the installation of a new ONTAP 9.8 cluster, you have to verify if AutoSupport works. In this scenario, which two commands would you use to accomplish this task? (Choose two.)

- A. system node autosupport history show
- B. system node autosupport check show
- C. system node autosupport destination show
- D. system node autosupport invoke

**Answer: AB**

#### NEW QUESTION 10

An administrator issued the cluster setup command and configured a 2-node ONTAP 9.8 cluster. In this scenario, which tool would the administrator use to validate the configuration?

- A. Active IQ Upgrade Advisor
- B. Interoperability Matrix Tool
- C. NetAppDocs
- D. Active IQ Config Advisor

**Answer: C**

#### NEW QUESTION 10

Your customer is migrating data from a legacy FAS8020 system that runs ONTAP9.5 software to a new AFFA250 MetroCluster over IP configuration. In this scenario, which two methods would be supported to migrate the data? (Choose two.)

- A. Perform a controller swap from the FAS8020 to the AFFA250s.
- B. Create a 4-node cluster on one side and use the volmove command to migrate the data.
- C. Use a host-based copy migration method.
- D. Configure a SnapMirror copy between the FAS8020 and the AFFA250 systems.

**Answer: AD**

#### NEW QUESTION 12

Click the Exhibit button.

```
cluster1::*> cluster ring show
```

Node	UnitName	Epoch	DB Epoch	DB Trnxs	Master	Online
-----	-----	-----	-----	-----	-----	-----
cluster1-01	mgmt	36	36	130	cluster1-02	secondary
cluster1-01	vldb	26	26	6	cluster1-02	secondary
cluster1-01	vifmgr	26	26	42	cluster1-02	secondary
cluster1-01	bcomd	26	26	1	cluster1-02	secondary
cluster1-01	crs	26	26	1	cluster1-02	secondary
cluster1-02	mgmt	36	36	130	cluster1-02	master
cluster1-02	vldb	26	26	6	cluster1-02	master
cluster1-02	vifmgr	26	26	42	cluster1-02	master
cluster1-02	bcomd	26	26	1	cluster1-02	master
cluster1-02	crs	26	26	1	cluster1-02	master
cluster1-03	mgmt	36	36	130	cluster1-02	secondary
cluster1-03	vldb	26	26	6	cluster1-02	secondary
cluster1-03	vifmgr	26	26	42	cluster1-02	secondary
cluster1-03	bcomd	26	26	1	cluster1-02	secondary
cluster1-03	crs	26	26	1	cluster1-02	secondary
cluster1-04	mgmt	36	36	130	cluster1-02	secondary
cluster1-04	vldb	26	26	6	cluster1-02	secondary
cluster1-04	vifmgr	26	26	42	cluster1-02	secondary
cluster1-04	bcomd	26	26	1	cluster1-02	secondary
cluster1-04	crs	26	26	1	cluster1-02	secondary

Immediately after installing a 4-node FAS8200 cluster, you discover that node, “cluster1-02”, must be removed from the cluster. You want to use the cluster remove-node command to remove the node. Referring to the exhibit, which two statements are correct? (Choose two.)

- A. Verify that high availability is configured for failover to the HA partner, then remove the node.
- B. Make the node ineligible by using the cluster modify -eligibility false command, then remove the node.

- C. Move Epsilon to cluster1-02, then remove the node.
- D. Remove the node, then the cluster will elect a new master to remain in quorum.

**Answer:** AC

#### NEW QUESTION 17

Your customer wants to know more about the network configuration within the cluster.  
In this scenario, which statement is correct about a LIF?

- A. A LIF is a port that provides physical connections.
- B. A LIF is created within a broadcast domain and contains a pool of IP address.
- C. A LIF is an IP address or a WWPN that is associated with a port.
- D. A LIF separates network domains to access cluster data.

**Answer:** C

#### NEW QUESTION 20

You are using Broadcom BES-53248 switches for a cluster interconnect in a base configuration. In this scenario, what is the minimum number of ISLs supported between the switches?

- A. 1
- B. 2
- C. 3
- D. 4

**Answer:** B

#### Explanation:

Reference: [https://docs.netapp.com/us-en/ontap-systems/switches/pdfs/sidebar/BES\\_53248\\_Switches.pdf](https://docs.netapp.com/us-en/ontap-systems/switches/pdfs/sidebar/BES_53248_Switches.pdf) (3)

#### NEW QUESTION 22

A customer wants to enable SnapMirror Synchronous across their environment. The customer must ensure that SnapMirror Synchronous will work across the environment.

In this scenario, which two statements are true? (Choose two.)

- A. A SnapMirror license is required on both the source cluster and the destination cluster.
- B. A SnapMirror Synchronous license is required on both the source and destination clusters.
- C. A SnapMirror license is not required on both the source cluster and the destination cluster.
- D. A SnapMirror Synchronous license is required on the source cluster.

**Answer:** BC

#### NEW QUESTION 24

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your NS0-184 Exam with Our Prep Materials Via below:**

<https://www.certleader.com/NS0-184-dumps.html>