

## Exam Questions JN0-105

Junos - Associate (JNCIA-Junos) 2024 Exam

<https://www.2passeasy.com/dumps/JN0-105/>



#### NEW QUESTION 1

Which statement is correct when multiple users are configuring a Junos device using the configure private command?

- A. A commit by any user will commit changes made by all active users.
- B. A commit will not succeed until there is only a single user in configuration mode.
- C. Each user gets their own candidate configuration.
- D. Each user shares the same candidate configuration.

**Answer:** C

#### Explanation:

When multiple users are configuring a Junos device using the "configure private" command, each user gets their own candidate configuration (C). This allows for isolated configuration sessions, where changes made by one user do not impact or interfere with the changes made by another user in their private session.

#### NEW QUESTION 2

You are asked to view the real-time usage statistics for the busiest interfaces on a device running Junos OS. Which command will achieve this task?

- A. monitor traffic absolute-sequence
- B. monitor interface traffic
- C. monitor traffic
- D. show interfaces extensive

**Answer:** B

#### Explanation:

To view real-time usage statistics for the busiest interfaces on a device running Junos OS, the correct command is B, "monitor interface traffic." This command provides a dynamic, real-time view of the traffic flowing through the interfaces, allowing administrators to quickly identify and monitor the busiest interfaces on the device.

#### NEW QUESTION 3

What are two advantages of using the Junos OS? (Choose two.)

- A. It enables you to roll back to a previous configuration.
- B. It pushes your configuration changes "live" immediately.
- C. It is modular.
- D. It supports up to a maximum of two previous configurations.

**Answer:** AC

#### Explanation:

One of the key advantages of Junos OS is its ability to roll back to previous configurations. This feature allows administrators to revert to an earlier configuration state, which is invaluable for quickly recovering from configuration errors or undesired changes. Junos OS maintains an archive of previous configurations, enabling easy rollback to any saved state. Another significant advantage of Junos OS is its modular design. The operating system is structured so that different processes and services run in separate protected memory spaces, enhancing the stability and reliability of the system. If one process fails, it does not affect the others, thereby minimizing the risk of system-wide failures.

#### NEW QUESTION 4

Which process in the Junos OS is responsible for device management tasks including the CLI and commit operations?

- A. mgd
- B. chassisd
- C. rpd
- D. dcd

**Answer:** A

#### Explanation:

In Junos OS, the management daemon (mgd) is responsible for handling all the device management tasks, including processing CLI commands and handling commit operations. The mgd daemon interacts with the Junos OS configuration database and provides the necessary logic to ensure that configuration changes are syntactically correct and do not conflict with each other. When a user commits a configuration, mgd validates the changes, applies them to the running configuration, and ensures that the necessary daemons are notified of the changes to apply them accordingly.

#### NEW QUESTION 5

Click the Exhibit button.



```
[edit protocols ospf]
user@router# show
area 0.0.0.0 {
    interface all;
}
export { policy1 policy2 policy3 };
[edit routing-options]
user@router# show
static {
    route 10.10.10.0/24 next-hop 192.168.1.254;
}
```

Referring to the exhibit, OSPF has three export policies that match different static route prefixes. The 10.10.10.0/24 static route does not match any terms in the policy1 routing policy.  
What happens next in this scenario?

- A. The static route is evaluated by the policy3 routing policy.
- B. The static route is evaluated by the policy2 routing policy.
- C. The static route is rejected by the default routing policy.
- D. The static route is rejected by the policy1 routing policy.

**Answer:** B

**Explanation:**

In Junos, when multiple policies are applied to a routing protocol for route export, the routes are evaluated in the order in which the policies are listed. In the exhibit, the OSPF configuration has three export policies listed: policy1, policy2, and policy3. The static route 10.10.10.0/24 does not match any terms in policy1; therefore, it is not rejected by policy1 but is instead passed on to the next policy in the sequence, which is policy2. If the static route matches a term in policy2 that permits the route, it will be exported into OSPF. If it does not match in policy2, it will then be evaluated by policy3. If there is no match in policy3 as well, and assuming there are no more policies listed, the route would then be subject to the default routing policy behavior, which typically rejects the route unless an explicit accept statement is present in the policies.

**NEW QUESTION 6**

Which two statements are true about the candidate configuration? (Choose two.)

- A. Candidate configuration changes are automatically applied.
- B. You can deploy multiple changes at the same time.
- C. Multiple users cannot modify the same candidate configuration.
- D. You can discard changes before committing them.

**Answer:** BD

**Explanation:**

The candidate configuration in Junos OS is a temporary configuration that allows network administrators to make and stage multiple configuration changes before applying them to the device. This approach enables the deployment of multiple changes in a single operation, ensuring that all configurations work together as intended before making them active. Additionally, the candidate configuration can be discarded if the administrator decides not to apply the staged changes, allowing for a "trial and error" approach without affecting the currently active configuration. This feature provides flexibility and reduces the risk of disruptive changes to the network.

**NEW QUESTION 7**

Which protocol is responsible for learning an IPv4 neighbor's MAC address?

- A. Address Resolution Protocol (ARP)
- B. Network Address Translation (NAT)
- C. Media Access Control Security (MACsec)
- D. Neighbor Discovery Protocol (NDP)

**Answer:** A

**Explanation:**

The Address Resolution Protocol (ARP) is responsible for mapping an IPv4 address to a machine's MAC address. ARP operates at Layer 2 of the OSI model and is used to find the MAC address of a host given its IPv4 address. When a device wants to communicate with another device on the same local network, it uses ARP to discover the recipient's MAC address.

References:

- ? Juniper official documentation: ARP.
- ? Networking standards: RFC 826.

**NEW QUESTION 8**

Which two statements about firewall filters are correct? (Choose two.)

- A. Firewall filters are stateless.
- B. Firewall filters can match Layer 7 parameters.
- C. Firewall filters are stateful.
- D. Firewall filters can match Layer 4 parameters.

**Answer:** AD

**Explanation:**

Firewall filters in Junos OS are stateless, meaning they process each packet individually without regard to the state of a connection or sequence of packets. These filters can match various packet attributes, including those at Layer 4, such as TCP and UDP port numbers. This allows for granular control over traffic based on the type of service or application. Unlike stateless filters, stateful firewalls keep track of the state of active connections and make decisions based on the context of the traffic flow, which is not a capability of Junos firewall filters. Additionally, Junos firewall filters primarily operate up to Layer 4 and do not natively inspect Layer 7 parameters, which involve application-level data.

**NEW QUESTION 9**

Which two external authentication methods does Junos support for administrative access? (Choose two.)

- A. TACACS+
- B. NIS
- C. RADIUS
- D. ACE


**Answer:** A

**Explanation:**

Junos OS supports several external authentication methods for administrative access, with TACACS+ (Terminal Access Controller Access-Control System Plus) and RADIUS (Remote Authentication Dial-In User Service) being among the most commonly used. Both TACACS+ and RADIUS are protocols that allow network devices to communicate with a central authentication server, enabling centralized control over user authentication and authorization. This centralization simplifies the management of user credentials and access policies, especially in larger networks with multiple devices.

**NEW QUESTION 10**

Click the Exhibit button.

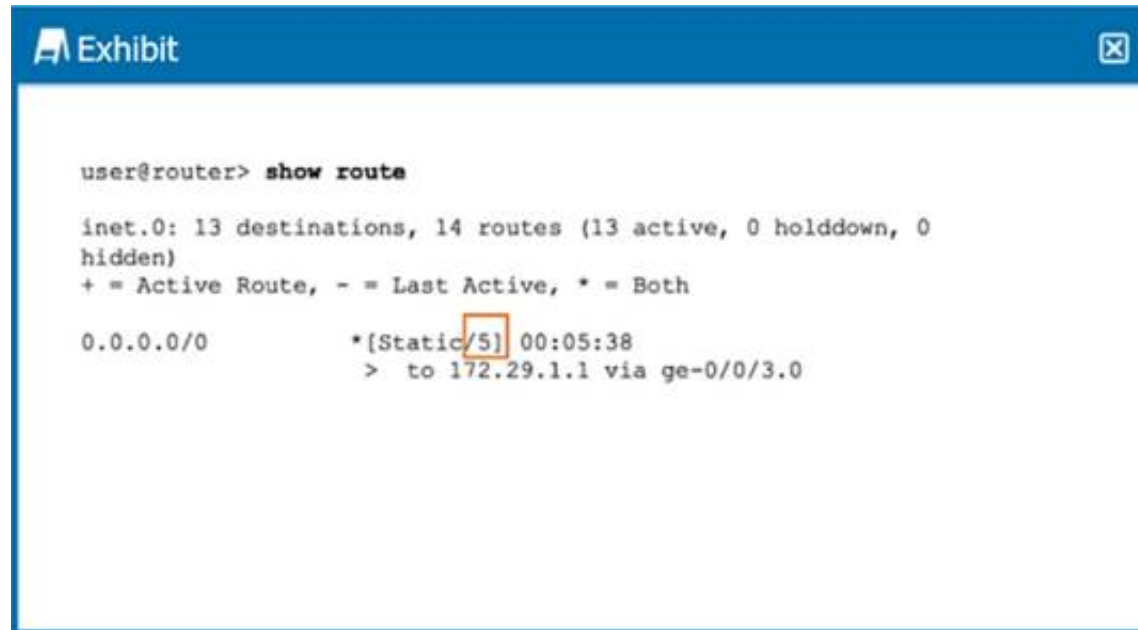

Referring the exhibit, what does the highlighted number indicate?

- A. route preference is 5
- B. hop count is 5
- C. cost is 5
- D. metric is 5

**Answer:** A

**Explanation:**

In the exhibit shown, the highlighted number next to the route type (Static) within the square brackets indicates the route preference, also known as the administrative distance. In Junos, the route preference is a value that determines the priority of the route source. Lower numbers indicate a higher priority when the routing table is being calculated. The route preference is used to select the best route when multiple paths to the same destination exist from different routing sources. The number 5 is unusually low for a static route by default, suggesting it has been manually configured to override other route types.

**NEW QUESTION 10**

You issue the monitor traffic interface ge-0/0/0 command. What will this command accomplish?

- A. It displays real-time statistics for interface ge-0/0/0.
- B. It displays an operational summary of ge-0/0/0.
- C. It displays the MTU and MAC address for ge-0/0/0.
- D. It displays a packet capture on interface ge-0/0/0.

**Answer:** D

**Explanation:**

The command "monitor traffic interface ge-0/0/0" (D) initiates a packet capture on the specified interface, allowing you to view the actual packets being transmitted and received. This is useful for troubleshooting and analyzing the traffic passing through the interface in real time.

**NEW QUESTION 14**

What does the user@router> clear log ospf-trace command accomplish?

- A. Logging data into ospf-trace is stopped.
- B. Trace parameters are removed from the OSPF protocol configuration.
- C. Data in the ospf-trace file is removed and logging continues.
- D. The ospf-trace file is deleted.

**Answer:** C

**Explanation:**

The clear log ospf-trace command on a Juniper Networks router is used specifically to manage the contents of the log file named ospf-trace. Executing this command clears or deletes the existing data within the ospf-trace log file but does not stop the logging process. The router continues to log new OSPF-related events and data into this file after the command is executed. This functionality is crucial for troubleshooting and monitoring the OSPF (Open Shortest Path First) protocol's operation by allowing network administrators to remove old or irrelevant log data while continuously capturing new events without interruption.

**NEW QUESTION 19**

Which two addresses are included in an Ethernet frame header? (Choose two.)

- A. source IP address
- B. source MAC address

- C. destination IP address
- D. destination MAC address

**Answer:** BD

**Explanation:**

An Ethernet frame header includes the source MAC address (B) and the destination MAC address (D). These addresses are used to deliver the frame from one Ethernet device to another directly connected Ethernet device on the same network segment. Ethernet frames do not include IP addresses, as those are part of the IP packet encapsulated within the Ethernet frame.

**NEW QUESTION 21**

What will the request system configuration rescue save command do?

- A. It saves the most recently committed configuration as the rescue configuration.
- B. It saves the candidate configuration as the rescue configuration.
- C. It saves a configuration version prior to the configuration most recently committed as the rescue configuration.
- D. It activates the rescue configuration.

**Answer:** A

**Explanation:**

The request system configuration rescue save command in Junos OS saves the most recently committed configuration as the rescue configuration. This rescue configuration can be used to recover the device if future configurations cause issues. It ensures there is a stable, known-good configuration to fall back on, which is crucial in network management and troubleshooting.

References:

- ? "rescue : save configurations as the rescue: request system configuration save  
.....( saves the current configs as a rescue configs )" from Useful Juniper Commands.txt.
- ? Juniper official documentation: Configuring and Activating a Rescue Configuration.

**NEW QUESTION 22**

In the Junos OS, which keyboard shortcut allows you to move to the start of the line?

- A. Ctrl+a
- B. Ctrl+e
- C. Ctrl+w
- D. Ctrl+k

**Answer:** A

**Explanation:**

In the Junos OS command-line interface (CLI), the keyboard shortcut Ctrl+a is used to move the cursor to the start of the line. This is a common convention in many command-line environments and text editors, providing a quick way to navigate to the beginning of the current command or line of text without having to use the arrow keys. This can be particularly useful for making quick edits to commands or for navigating long lines of text more efficiently.

**NEW QUESTION 26**

You are configuring a firewall filter on a Juniper device.

In this scenario, what are two valid terminating actions? (Choose two.)

- A. 1 count
- B. 2discard
- C. 3next term
- D. 4accept

**Answer:** BD

**Explanation:**

In Juniper firewall filter configurations, "discard" and "accept" are two valid terminating actions for a term within a filter. The "discard" action drops the packet, preventing it from reaching its intended destination, while the "accept" action allows the packet to pass through the filter, proceeding to its next hop or destination. "Count" is a non-terminating action that increments a counter every time a packet matches the term but does not inherently determine the packet's fate. "Next term" directs the evaluation to proceed to the next term in the filter for further processing, also a non-terminating action.

**NEW QUESTION 28**

What are two physical interface properties? (Choose two.)

- A. MAC address
- B. IP address
- C. routing protocols
- D. MTU

**Answer:** AD

**Explanation:**

Two physical interface properties in Junos OS include the MAC address (A) and the Maximum Transmission Unit (MTU) size (D). The MAC address is a hardware identifier for the network interface, while the MTU size determines the largest packet size that the interface can transmit without needing to fragment the packet.

**NEW QUESTION 32**

What are two types of transit traffic that traverse the forwarding plane of a Layer 3 router? (Choose two.)



- A. unicast traffic
- B. multicast traffic
- C. exception traffic
- D. broadcast traffic

**Answer:** AB

**Explanation:**

Transit traffic that traverses the forwarding plane of a Layer 3 router includes both unicast and multicast traffic types. Unicast traffic is directed from a single source to a single destination, while multicast traffic is sent from one source to multiple destinations that are part of a multicast group. These types of traffic are efficiently routed through the network by leveraging the router's forwarding plane capabilities. Exception traffic, which requires special handling by the control plane, and broadcast traffic, which is typically limited to a single broadcast domain and not usually forwarded by Layer 3 routers, are not considered standard types of transit traffic for the forwarding plane of a router.

**NEW QUESTION 34**

Which two statements are true about the Junos OS? (Choose two.)

- A. Routing tables are stored in the control plane.
- B. Exception traffic is never sent to the control plane.
- C. Exception traffic is sent to the control plane.
- D. Routing tables are stored in the forwarding plane.

**Answer:** AC

**Explanation:**

In Junos OS, as with many network operating systems, the control plane is responsible for processes that determine how to route traffic. This includes maintaining routing tables, which store information about network paths and protocols. Therefore, routing tables are indeed stored in the control plane.

Exception traffic refers to packets that cannot be processed by the normal fast-path processing of the Packet Forwarding Engine (PFE) in the forwarding plane, and thus are sent to the control plane for further processing. This might include packets destined for the router itself, packets that need to be fragmented, or packets that match certain firewall filter criteria, among other reasons.

Routing tables are not stored in the forwarding plane. However, the forwarding plane contains the forwarding table (sometimes referred to as the forwarding information base or FIB), which is a distilled version of the routing table optimized for fast packet forwarding. The forwarding plane uses this information to perform the actual transfer of packets across the network device interfaces.

**NEW QUESTION 39**

Which protocol would you configure to synchronize the time and date on a Junos device?

- A. SNMP
- B. RIP
- C. NTP
- D. NMP

**Answer:** C

**Explanation:**

The Network Time Protocol (NTP) is designed to synchronize the clocks of computers over a network. Configuring NTP on a Junos device ensures that its clock is set accurately, which is crucial for logging, troubleshooting, and maintaining the integrity of time-sensitive operations and security protocols. NTP allows devices to use a hierarchy of time sources, from primary servers synchronized to a reference clock (such as an atomic clock or GPS time) to secondary servers that distribute the time to other devices on the network.

**NEW QUESTION 41**

Which two statements are correct about the employee@R1> prompt? (Choose two.)

- A. R1 is the hostname of your device.
- B. You are in operational mode.
- C. You are in configuration mode.
- D. You are at a shell prompt.

**Answer:** AB

**Explanation:**

In Junos OS, the prompt employee@R1> indicates the current context of the user interface. The 'R1' part of the prompt signifies the hostname of the device, which in this case is 'R1'. The absence of a '#' symbol at the end of the prompt suggests that the user is in operational mode, as opposed to configuration mode which is indicated by a prompt ending in '#'. Operational mode allows users to view the status of the device and execute operational commands, but does not allow for configuration changes.

**NEW QUESTION 45**

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual JN0-105 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the JN0-105 Product From:

<https://www.2passeasy.com/dumps/JN0-105/>

## Money Back Guarantee

### JN0-105 Practice Exam Features:

- \* JN0-105 Questions and Answers Updated Frequently
- \* JN0-105 Practice Questions Verified by Expert Senior Certified Staff
- \* JN0-105 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* JN0-105 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year